



SONESSE® ULTRA 50 AC

Our premium line-voltage motor has near-silent audible levels and the load-carrying capacity to handle any shade.

- The power cord cannot be to lengths <18" / 45cm as the power cord functions as the antenna
- Available with a 9' cable motor cord that requires termination. Optional cord lengths (up to 18') with 3 prong plugs available as an upgrade
- Wiring AC power may require an electrician and a permit. Check local regulations
- Available with Fast Connector as an upgrade



MOTOR SPECIFICATIONS

Voltage	120V AC
Sound Level*	≤38 dBA
RF Control Range (will vary)	60ft


*According to standards ISO 374 NF 31022 in dBA

SHADE SPECIFICATIONS

MIN Roman Shade Width	35.75"
MIN Roller Shade Width	35.25"
MIN Roman Shade Headrail Depth	3.5"
MAX Roller Shade Diameter	4.75"
Approximate Lift Capacity*	48lbs


*For reference only. Specific load capacity for all shades to be determined by Hartmann&Forbes

MOTOR AND BRACKETING DIMENSIONS

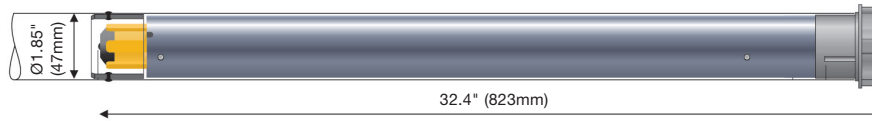

Idler Side

Motor Side

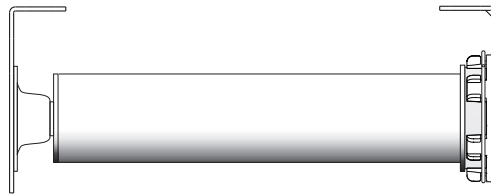

Standard Brackets

Extended Brackets

